


IMM Quality Boat Lifts


TRIDENT BOAT LIFT SPECIFICATIONS

3 POST BOAT LIFTS WITH 2 CRADLE BEAMS AND 4 CABLES

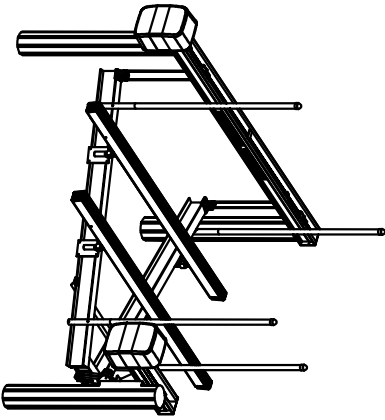

ALL SPACING TO CENTER OF PILING

LIFT CAPACITY	A	B	C	RECOMMENDED Min. PILE SIZE
7,000 LB	144"	144"	161"	10" DIA.
10,000 LB	144"	150"	166"	10" DIA.

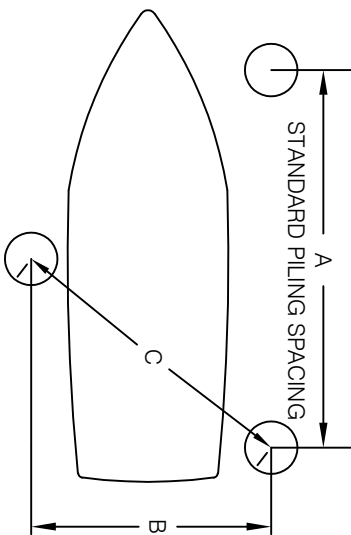

LIFT CAPACITY lbs.	CABLE BEAM SIZE CUSTOM CHANNEL 6061-T6	CRADLE SIZE I-BEAM 6061-T6	GROUND CABLE WINDER SIZE inches	DRIVE SHAFT SIZE inches	GEAR RATIO	NO. OF MOTORS # H.P.	CABLES	LIFT SPEED in/min	GUIDE POST HEIGHT	BOAT BUNKS WOOD OPTION	BOAT BUNKS ALUM. OPTION
7,000	6 x .230 H 2 x .160 W	6 x .190 H 4 x .290 W 148 L	3.5" DIA. 8.5" Length LIFTS 14 FT.	2.875 TUBE	450:1	(2) 1/4 HP 230V/13A	5/16 SSAC 7x19 304, 1P 18"	44	7	2 x 8 x 144	144
10,000	7 x .230 H 2 x .160 W	8 x .230 H 5 x .330 W 154 L	3.5" DIA. 12.5" Length LIFTS 12 FT.	2.875 TUBE	450:1	(2) 1/4 HP 230V/19A	5/16 SSAC 7x19 304, 2P 32"	22	7	2 x 8 x 144	144

IMM BOAT LIFTS, INC. IS NOT RESPONSIBLE FOR THE DOCK STRUCTURE OR ITS ABILITY RESIST THE APPLIED LOADS OF THE BOAT LIFT. THE SITE SHOULD BE VERIFIED BY A LICENSED MARINE CONTRACTOR. APPLIED LOADS WILL BE PROVIDED UPON REQUEST.

