


IMM QUALITY BOAT LIFTS

PLATINUM 8 POST BOAT LIFTS

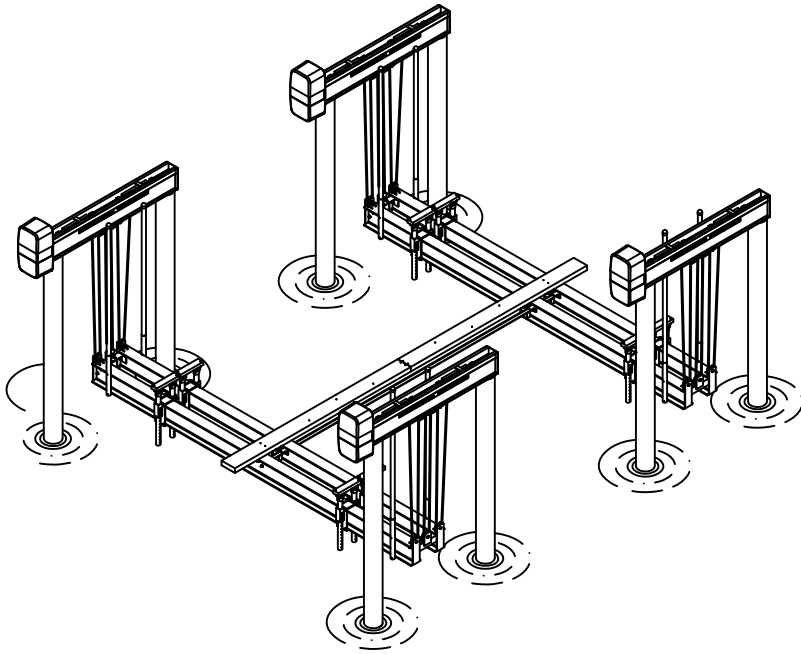

STRUCTURAL ENGINEERING REVIEW

THIS CONSTRUCTION HAS BEEN DESIGNED AS A MAIN WIND FORCE RESISTING SYSTEM, WITH CALCULATED GRAVITY AND WIND LOADS IN COMPLIANCE WITH THE FLORIDA BUILDING CODE, 8th Edition, 2023, CHAPTERS 16 & 20, ADM 2020, ASCE/SEI 7-22, AND "MINIMUM DESIGN LOADS AND OTHER CRITERIA FOR BUILDINGS AND OTHER STRUCTURES" TO WITHSTAND THE WIND LOADS ASSOCIATED WITH AN ULTIMATE WIND SPEED OF 180 MPH, EXPOSURE 'D', RISK CATEGORY 'I'. J.L. SANDERS, PE HAS NO CONTROL OF THE MANUFACTURING, PERFORMANCE, OR INSTALLATION OF THIS PRODUCT. THESE GENERIC PLANS WERE ENGINEERED IN ACCORDANCE WITH ACCEPTED ENGINEERING PRACTICES AND DATA PROVIDED BY THE MANUFACTURER.

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY J.L. SANDERS, PE ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

J.L. SANDERS, PE
2515 Grabs Road NW
Monroe, GA 30656
239-671-1578

J.L. SANDERS
Reg. Florida No.66361

Date:

IMM BOAT LIFTS, INC. IS NOT RESPONSIBLE FOR THE DOCK STRUCTURE, OR ITS ABILITY RESIST THE APPLIED LOADS OF THE BOAT LIFT. THE SITE SHOULD BE VERIFIED BY A LICENSED MARINE CONTRACTOR. APPLIED LOADS WILL BE PROVIDED UPON REQUEST.

BOATS SHALL NOT BE STORED ON LIFTS DURING HIGH WIND EVENTS.

LIFT CAPACITY LBS.	CABLE BEAM SIZE CUSTOM CHANNEL 6061-T6, 6005A-T5	GROOVED CABLE WINDER SIZE 6061-T6, 6005A-T5	DRIVE SHAFT SIZE	GEAR RATIO	NO. OF MOTORS & H.P. 1750 RPM	CABLE SIZE	INCHES OF LIFT PER MINUTE	GUIDE POST HEIGHT	BOAT BUNKS	CRADLE BEAM SIZE "I" BM - INCHES
32,000	11 x .230 H 2 x .160 W	2.375 DIA, 20" Length LIFTS 12 FT.	1.90" TUBE 8 ga	375:1	4 1HP 230V/26A	5/16 SSAC 7x19 304, 2P 66'	18	10		12 x .310 H 7 x .620 W 216 L
40,000	11 x .230 H 2 x .160 W	2.375 DIA, 25" Length LIFTS 12 FT.	1.90" TUBE 8 ga	375:1	4 1HP 230V/26A	5/16 SSAC 7x19 304, 3P 120'	12	10	**CUSTOM BUNK SYSTEM	(2) 12 x .290 H 7 x .470 W 216 L
54,000	14 x .313 H 2 x .313 W	3 DIA, 21" Length LIFTS 12 FT.	2.875" TUBE 8 ga	450:1	4 1-1/2HP 230V/36A	5/16 SSAC 7x19 304, 4P 148'	11	10		(2) 12 x .310 H 7 x .620 W 240 L

GEAR DRIVE RATIO	NO. OF MOTORS & H.P. 3450 RPM	INCHES OF LIFT PER MINUTE
375:1	(4) 2HP 230V/42A	36
375:1	(4) 2HP 230V/42A	24
450:1	(4) 2HP 230V/42A	22


HI-SPEED OPTION

ALL SPACING TO CENTER OF PILING

Lift Capacity	A	B	C	D	Rec. min. Pile size
32,000 lb.	84"	216"	231.75"	*	10" dia.
40,000 lb.	84"	216"	231.75"	*	10" dia.
54,000 lb.	84"	240"	254.25"	*	10" dia.

Note: all Dimensions $\pm 2"$

*Standard spacing for dimension 'D' is 288".
Dimension 'D' dependent on boat length.

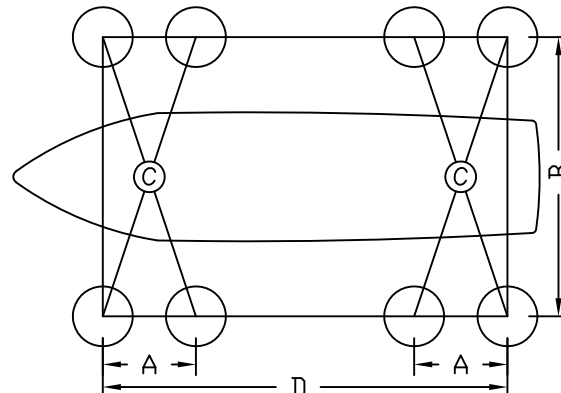

PLATINUM WIRING SCHEMATIC

MINIMUM RECOMMENDED WIRE SIZE TABLE (AWG)				
COPPER WIRE ONLY				
LIFT CAPACITY	MAXIMUM DISTANCE FROM SERVICE TO CONTROLLER			
	75 FEET	150 FEET	300 FEET	400 FEET
32000# TO 54000# AT 230 VOLTS	#6	#4	#2	#0

